(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number
WO 03/089755 A1

(51) International Patent Classification[7]: E21B 21/10, 43/10, 34/12

(21) International Application Number: PCT/GB03/01596

(22) International Filing Date: 14 April 2003 (14.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0208673.4 16 April 2002 (16.04.2002) GB

(71) Applicant *(for all designated States except US)*: **SPECIALISED PETROLEUM SERVICES GROUP LIMITED** [GB/GB]; Arnhall Business Park, Westhill, Aberdeen AB32 6TQ (GB).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **CARMICHAEL, Mark** [GB/GB]; Douet de Rue, St Mary, Jersey JE3 3EF (GB).

(74) Agent: **KENNEDYS PATENT AGENCY LIMITED**; Queens House, Floor 5, 29 St. Vincent Place, Glasgow G1 2DT (GB).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: CIRCULATING SUB

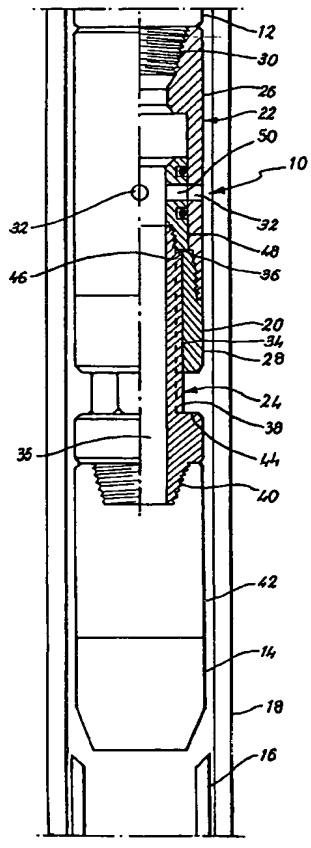

(57) Abstract: A control sub for use with a hydraulically operated downhole tool. In an embodiment, the sub comprises an outer sleeve connected to a work string and an inner sleeve slidably engaged to the outer sleeve by matching hex profiles, connected to the downhole tool. Radial ports in the outer sleeve provide selective circulation of fluid from the tool and by closing these ports with the sleeve fluid pressure in to the downhole tool can be controlled. Closure is effected by setting down weight on the sub against the tool. An indexing mechanism is also described to keep the tool in a configuration, which maintains pressure on the tool. The sub is suitable for use with an expander tool.

WO 03/089755 A1

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CIRCULATING SUB

The present invention relates to hydraulically operated downhole tools and in particular, though not exclusively, to a control sub to provide selective control of a hydraulically operated expander tool for tubulars.

It is known in the art to utilise the pressure of fluid pumped through a work string in a well bore to control a hydraulically activated tool in the well bore. For instance, when expanding tubulars such as slotted, screen or solid pipe a rotary expander may be used. These expanders have a cone head with an outer diameter greater than the diameter of the tubular. On the tool are arranged hydraulically operated rollers. When mounted on the end of a work string and inserted into a tubular, hydraulic pressure introduced to the expander tool will force the cone through the tubular and with the aid of the rollers the tubular will be expanded to the diameter of the expander tool.

The hydraulic pressure to operate these tools is typically supplied from the surface of the well bore by

pumps. Due to the distances of travel to the location of the expander tool it is difficult to control the operation of the expander tool and, in particular, to provide a constant pressure to give a uniform control and therefore expansion of the tubular in the well bore. It is also difficult to start and/or stop the expander tool at desired locations in the well bore.

It has been recognised that being able to control the flow of hydraulic fluid adjacent a hydraulically operated downhole tool would be advantageous. US 5,392,862 describes a drilling mud flow control sub that provides the necessary fluid flow and pressure to activate an expanding remedial tool such as an underreamer, section mill or other cutting tool. The sub consists of a cylindrical sub assembly housing forming a first upstream end and a second downstream end. The housing is threadably connected between a drill string at its first upstream end and a tool at its downstream end. Intermediate the upstream and downstream ends is located a drop ball seat so that insertion of a drop ball will prevent hydraulic fluid flow to the tool. A rupture disc is affixed to a hole formed in the control sub wall normal to the sub axis, above the drop ball seat, so that when obstructed fluid is shunted from sub.

This flow control sub provides means to terminate fluid flow to the tools hydraulically operating mechanism while allowing fluid circulation through the sub when the tool is 'deactivated' while 'tripping' and/or rotating the drill string. However a major disadvantage of this tool is in the single function operation i.e. in turning the hydraulic mechanism off. There is no selective control of

the tool. Additionally when hydraulic fluid is applied to the tool through the sub the pressure of this fluid can only be controlled from the surface as with the prior art systems. Further a disadvantage is in the length of time taken for the drop ball to reach the seat and the associated difficulties if the single ball does not locate correctly in the seat.

It is an object of at least one embodiment of the present invention to provide a control sub for use with a hydraulically operated downhole tool which allows the tool to be operated in selective on and off configurations.

It is a further object of at least one embodiment of the present invention to provide a control sub for use with a hydraulically operated downhole tool which allows control of the hydraulic pressure delivered to the tool.

It is a yet further object of at least one embodiment of the present invention to provide a control sub for use with a hydraulically operated downhole tool which allows selective control of fluid circulation when the tool is run in or tripped from the well.

It is a still further object of the present invention to provide a method of controlling hydraulic pressure to a hydraulically operated downhole tool in a well bore.

According to a first aspect of the present invention there is provided a control sub for use with a hydraulically operated downhole tool, comprising a tubular assembly having a through passage between an

inlet and a first outlet, the inlet being adapted for connection on a workstring, the first outlet being adapted for connection to a hydraulically operated downhole tool, one or more radial outlets extending generally transversely of the tubular assembly, an obturating member moveable between a first position permitting fluid flow through the one or more radial outlets and a second position closing the one or more radial outlets, wherein the obturating member is moved from the first position to the second position by a compressive force applied from the tool.

It will be appreciated that release of the compressive force will open the one or more radial outlets and thus by varying the compressive force applied from the tool the amount of fluid circulated radially out of the sub can be controlled. Preferably the cross-sectional area of the first outlet is greater than the cross-sectional area of the second outlet. By varying the circulation of fluid radially from the sub the fluid exiting the sub through the first outlet can be varied. This fluid exiting the first outlet controls the hydraulic pressure applied to the tool and therefore the operation of the tool.

Preferably the compressive force occurs from the downhole tool remaining static relative to movement of the workstring and the control sub. Thus the control sub acts in a similar manner to weight set tools but provides control as weight is set.

Preferably the tubular assembly comprises an inner sleeve and an outer sleeve, sealingly engaged to each other. Preferably the outer sleeve is adapted to connect to the

work string and the inner sleeve is adapted to connect to the tool. More preferably the inner and outer sleeves include mutually engageable faces so that the sleeves may be axially slideable in relation to each other over a fixed distance.

Preferably also the obturating member is a sleeve. Advantageously the sleeve is coupled to the inner sleeve of the tubular assembly. Preferably the obturating member is also axially slideable within the tubular assembly.

Preferably the one or more radial ports are located on the outer sleeve. Advantageously matching radial ports are located on the obturating member such that under compression each set of radial ports align to allow fluid to flow radially from the sub.

Preferably an outer surface of the inner sleeve includes a portion having a polygonal cross-section. Preferably also an inner surface of the outer sleeve has a matching polygonal cross-section. These matching sections ensure that when the work string is rotated the sub is rotated and with it the hydraulically operated tool. More preferably the polygonal cross section is a hex cross-section.

Preferably also the sub includes an indexing mechanism. The indexing mechanism may comprise mutually engageable formations on the inner and outer sleeves. Preferably the engagement formations comprise a member and a recess in which the member may be engaged. The member may comprise a pin and the recess may comprise a slot. Preferably, one

of the member and the pin is mounted on the outer sleeve and the other is mounted on the inner sleeve. Typically the slot extends circumferentially around the respective sleeve and the pin may move circumferentially with respect to the slot.

Preferably the slot and/or pin is configured such that the pin and slot move in only one direction to each other when engaged and operated.

Preferably also the slot includes one or more longitudinal profiles as offshoots from the circumferential path. When the pin is located in such a profile, the sleeves may move relative to each other to effect the relocation of the obturating member from one position to another.

According to a second aspect of the present invention there is provided a method of controlling a hydraulically operated downhole tool in a well bore, the method comprising the steps:

(a) mounting above the tool on a work string a control sub, the sub including a first outlet to the tool and one or more radial outlets through which fluid within the work string will flow when not obstructed by an obturating member, the obturating member being moveable under a compressive force from the tool;

(b) running the tool into a well bore and locating the tool on a formation in the well bore;

(c) compressing the control sub by setting down weight

on the tool;

(d) using the compressive force to move the obturating member and thereby control the fluid flow through the radial outlets, regulating the fluid pressure from the first outlet to hydraulically control the tool.

Preferably the method includes the step of running the tool in the well bore with the radial outlets in an open position and circulating fluid within the well bore.

Preferably the method includes the step of indexing the sleeves with respect to each other to move a pin in a sleeve within a recess of the other sleeve. Further steps may therefore include locating the pin in a position wherein the compressive force may be released and the radial ports may selectively be in an open or closed position.

Preferably also the method may include the steps of picking up and setting down the weight of the string repeatedly to cycle opening and closing of the radial outlets and thus provide a selective continuous 'on' and 'off' operation of the tool.

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings of which:

Figures 1(a) to (d) are a series of part cross-sectional schematic views of a control sub, according to an embodiment of the present invention, in a work string with an expander tool illustrating the operating

positions of the control sub during expansion of a pipe; and

Figure 2 is an illustration of an indexing mechanism showing the outer surface of an inner sleeve and, in cross-section, the outer sleeve of a control sub according to a further embodiment of the present invention.

Reference is initially made to Figures 1(a) to (d) of the drawings which illustrates a control sub, generally indicated by Reference Numeral 10 according to an embodiment of the present invention, in a work string 12 with an expander tool 14 illustrating the operating positions of the control sub 10 during expansion of a pipe 16 within a casing 18 of a well bore.

With specific reference to Figure 1(a), control sub 10 comprises a tubular body 20 having an outer sleeve 22 and an inner sleeve 24. Outer sleeve 22 is of two-part construction, having an upper portion 26 and a lower portion 28. Upper portion 26 includes a threadable portion 30 for connection of the sub 10 to a work string 12. Upper portion 26 includes four apertures 32 circumferentially arranged around the sleeve 22 to provide access through the sleeve 22. Lower portion 28 is threadably attached to upper portion 26. Lower portion 28 has an inner surface 34, which is hexagonal in cross-section. When threaded together the upper 26 and lower 28 portions of the outer sleeve 22 provide a lip 36 whose purpose will be described hereinafter.

Inner sleeve 24 includes a central bore 35 through which fluid may pass through the control sub 10. Inner sleeve 24 has an outer surface 38 having a hexagonal cross-section to match the inner surface 34 of the outer sleeve 22. Inner sleeve 24 further provides a threadable connection 40 at the base of the sub 10 for connection to an adapter 42 for an expander tool 14. Beside the threadable connection 40 is located a stop 44.

The upper end of inner sleeve 22 is threadably connected to an obturating sleeve 48. Obturating sleeve 48 is located within the inner bore 35 of the control sub 10. Obturating member 48 includes a matching set of apertures 50 to those apertures 32 in the outer sleeve 22. It will be appreciated by those skilled in the art that the size and dimensions of the apertures 50 could be varied to provide a flow profile to regulate flow through the apertures 32 of the outer sleeve 22. Further at a lower end of sleeve 48 is located a lip 46.

In use, the control sub 10 is mounted at the end of a work string 12 by threadable connection 30. An expander tool 14 is located onto the control sub via a threadable connection 40 with an optional adapter 42. As seen in Figure 1(a), when mounted the lips 36, 46 of the outer sleeve 22 and obturating sleeve 48 respectively abut so that the inner sleeve 24 and obturating sleeve 48 are supported from the outer sleeve 24. In this first position of the obturating sleeve 48 the apertures 50 and 32 are aligned to provide a radial port for the expulsion of fluid radially from the sub 10 towards the casing 18. This is the configuration chosen for running the work string into the well and thus fluid can circulate from

the sub via the inner bore 35 and the radial port provided by the apertures 32, 50.

Reference is now made to Figure 1(b) of the drawings wherein the work string has been run in the well bore through the casing 18 and the expander tool 14 has now located on a pipe 16 which requires to be expanded radially. When the expander tool 14 reaches the pipe, the expander tool will be stopped and the weight of the string will bear down upon the tool such that the tool 14 provides a compressive force onto the sub 10. The compression force will move the inner sleeve 24 relative to the outer sleeve 22, such that the inner sleeve 24 remains static and the outer sleeve 22 is shifted relatively downwards. This shift of the sleeves 22 and 24 provides an apparent shift of the obturating sleeve 48 such that the apertures 32, 50 are now mis-aligned. Fluid flow is now prevented from exiting the tool radially through the apertures 32, 50. Further fluid is prevented from escaping between the sleeves 22, 24 by virtue of the o-rings 52, 54 located on either side of the aperture 50 of the obturating sleeve 48.

Reference is now made to Figure 1(c) of the drawings wherein the sub 10 is held in compression. The expander tool 14 has been pressured up and no pumping of fluid through the inner bore 35 is required to maintain the expander tool in the actuated position unless a bleed is located in the expander tool 14. Pipe 16 is expanded by virtue of a cone 56 of the tool entering the pipe 16 and forcing the pipe to expand to a diameter equal to the actuated expander tool 14. Expander tool 14 is operated from a constant pressure of fluid delivered through the

inner bore 35. Pipe 16 can become sealingly engaged to the casing in this operation. Alternatively, there may be annulus remaining between pipe 16 and casing 18.

It will be appreciated by those skilled in the art that any type of hydraulically operated expander tool could be used in this configuration and thus, a full description of an expander tool is absent so as not to limit the present invention.

As the expander tool expands the pipe it maintains a compressive force on the sub 10 so that the ports 32, 50 remain mis-aligned for the pressure to be maintained constantly through the inner bore 35. In a preferred embodiment of the present invention there is located within the bore 35 a sensor 58. Sensor 58 is a downhole pressure memory gauge which monitors the pressure of the hydraulic fluid through the bore 35. This can be used to determine that a constant hydraulic pressure has been exerted on the expander tool to monitor the expansion of the pipe 16. It will further be appreciated that if the pressure within the bore 35 requires to be adjusted, weight can be released from the string 12 thereby reducing the compressive force from the expander tool 14 such that some alignment of the apertures 32, 50 occurs and a small radial expulsion of fluid from the sub 10 may occur to control the pressure within the bore 35.

When the pipe 16 is fully expanded in the casing 18 the expander tool 14 can be pulled from the well by "tripping" the sub 10 on the work string 12 from the casing 18. As the expander tool 14 does not abut the surface of the pipe 16 when the pipe 16 is expanded, as

shown in Figure 1(d), there is no weight bearing facility for the expander tool 14 and thus a compressive force on the sub 10 is released. When the compressive force is released, the inner sleeve 24 drops in relation to the outer sleeve 22 and thereby causes the obturating sleeve 48 to relocate to the first position wherein the apertures 32 and 50 are now realigned to provide a radial port for hydraulic fluid within the inner bore 35 to pass from the sub 10 into the annulus created between the sub 10 and the casing 18. Thus, as the tool 14 is pulled out of the hole, fluid can circulate within the well bore. Control sub 10 is thus in tension during this operation.

Reference is now made to Figure 2 of the drawings, which illustrates an additional feature of the sub 10, provided in a further embodiment of the present invention. Like parts to those of Figure 1 have been given the same Reference Numeral but are now suffixed 'a'.

In this embodiment the sub 10 is provided within an indexing mechanism generally indicated by Reference Numeral 60. Indexing mechanism 60 comprises an index sleeve 62 located on the inner sleeve 24 on the sub 10a. On the outer surface 38a there is located a profile 64. Profile 64 is a key providing a lower 66 circumferential arrangement of v-grooves and on every second groove there is located a longitudinal portion 68. On the outer sleeve 22a there is located one or more index pins 70. In the embodiment shown there is one index pin 70. Index pin 70 is arranged to project towards the inner bore 35a and locate within the profile 64. The pin 70 may move to any position within the profile 64 as long as it remains

in the path provided around the lower profile 66 or is located into one of the longitudinal portions 68.

In operation, a sub 10a including the index mechanism 60 would be run into a casing as described herein with reference to Figure 1. When the tool has landed on a formation in well bore, the pin 70, originally located in the longitudinal portion 68, will be driven along the slot and into the circumferential portion 66.

When the pin 70 is located at a top 72 of the longitudinal portion 68, the radial ports 32a, 50a are aligned and fluid may circulate from the sub 10a as described herein before.

When the index pin 70 is located within the circumferential portion 66, the ports 32a, 50a are closed as described herein with reference to Figure 1(b) and 1(c). As the circumferential slot 66 includes a number of v-grooves, each v-groove provides a cavity 74 into which the pin 70 can locate and be held relative to the sleeve 62. When the pin 70 is located in the cavity 74, the sub 10a can be picked up on the string 12a and thus the expander tool can be tripped from the well bore with the ports 32a and 50a in a closed position. By compression and release of the sub in a reciprocating action, the index pin 70 can be moved around the circumferential profile 66 and thereby the position of the ports 32a, 50a, can be selected to provide controlled operation of the tool 14a.

In the embodiment shown in Figure 2, the sub 10a may be picked up while the ports 32a, 50a remain closed and only

on every second time the tool is picked up will the ports become open by virtue of the pin moving from the cavity 74 into the slot 68.

A principal advantage of the present invention is that it provides a control sub for a hydraulically operated downhole tool, which controls the hydraulic pressure to the tool adjacent to the sub. A further advantage of the present invention is that it provides selective operation of a hydraulically operated downhole tool while the tool is in the well bore.

By use of an indexing mechanism, a further advantage of the present invention is that it ensures that pressure is maintained upon the expander tool without the risk of the radial ports opening and thus the expander tool can be reciprocated within a well bore without loss of hydraulic pressure upon the expander tool.

Modifications may be made to the invention herein described without departing from the scope thereof. For example, it will be appreciated that any number of apertures can be arranged to provide radial expulsion of the fluid for circulation from the sub. Additionally, these ports may be arranged to expel fluid in a direction substantially upwards or downwards in relation to the casing. Further, it will be appreciated that the control sub of the present invention could be used in a well bore, which is vertical, inclined or horizontal.

CLAIMS

1. A control sub for use with a hydraulically operated downhole tool, comprising a tubular assembly having a through passage between an inlet and a first outlet, the inlet being adapted for connection on a workstring, the first outlet being adapted for connection to a hydraulically operated downhole tool, one or more radial outlets extending generally transversely of the tubular assembly, an obturating member moveable between a first position permitting fluid flow through the one or more radial outlets and a second position closing the one or more radial outlets, wherein the obturating member is moved from the first position to the second position by a compressive force applied from the tool.

2. A control sub as claimed in Claim 1 wherein a cross-sectional area of the first outlet is greater than a cross-sectional area of the second outlet.

3. A control sub as claimed in Claim 1 or Claim 2 wherein the compressive force occurs from the downhole tool remaining static relative to movement of the workstring and the control sub.

4. A control sub as claimed in any preceding Claim wherein the tubular assembly comprises an inner sleeve and an outer sleeve, sealingly engaged to each other.

5. A control sub as claimed in Claim 4 wherein the outer sleeve is adapted to connect to the work string and the inner sleeve is adapted to connect to the tool.

6. A control sub as claimed in Claim 4 or Claim 5 wherein the inner and outer the sleeves include mutually engageable faces so that the sleeves may be axially slideable in relation to each other over a fixed distance.

7. A control sub as claimed in any one of Claims 4 to 6 wherein the obturating member is a sleeve, coupled to the inner sleeve of the tubular assembly.

8. A control sub as claimed in any one of Claims 4 to 7 wherein the one or more radial ports are located on the outer sleeve.

9. A control sub as claimed in Claim 8 wherein matching radial ports are located on the obturating member such that under compression each set of radial ports align to allow fluid to flow radially from the sub.

10. A control sub as claimed in any one of Claims 4 to 9 wherein an outer surface of the inner sleeve includes a portion having a polygonal cross-section and an inner surface of the outer sleeve has a matching polygonal cross-section.

11. A control sub as claimed in Claim 10 wherein the polygonal cross sections are hex cross-sections.

12. A control sub as claimed in any preceding Claim wherein the sub further includes an indexing mechanism.

13. A control sub as claimed in Claim 12 wherein the indexing mechanism comprises mutually engageable

formations on the inner and outer sleeves.

14. A control sub as claimed in Claim 13 wherein the engageable formations comprise at least one pin and a slot into which the pin(s) engage.

15. A control sub as claimed in Claim 14 wherein the slot extends circumferentially around a surface of a sleeve to provide a circumferential path for the pin.

16. A control sub as claimed in Claim 15 wherein the slot includes one or more longitudinal profiles as offshoots from the circumferential path to allow the sleeves to move relative to each other to effect the relocation of the obturating member from one position to another.

17. A method of controlling a hydraulically operated downhole tool in a well bore, the method comprising the steps:

a) mounting above the tool on a work string a control sub, the sub including a first outlet to the tool and one or more radial outlets through which fluid within the work string will flow when not obstructed by an obturating member, the obturating member being moveable under a compressive force from the tool;

b) running the tool into a well bore and locating the tool on a formation in the well bore;

c) compressing the control sub by setting down weight on the tool;

d) using the compressive force to move the obturating member and thereby control the fluid flow through the radial outlets, regulating the fluid pressure from the first outlet to hydraulically control the tool.

18. A method as claimed in Claim 17 wherein the method includes the step of running the tool in the well bore with the radial outlets in an open position and circulating fluid within the well bore.

19. A method as claimed in Claim 17 or Claim 18 wherein the method includes the step of indexing the sleeves with respect to each other to move a pin in a sleeve within a recess of another sleeve.

20. A method as claimed in Claim 19 wherein the method further includes the steps of locating the pin in a position wherein the compressive force is released and the radial ports are selectively moved to an open or closed position.

21. A method as claimed in any one of Claims 17 to 20 wherein the method include the steps of picking up and setting down the weight of the string repeatedly to cycle opening and closing of the radial outlets and thus provide a selective continuous 'on' and 'off' operation of the tool.

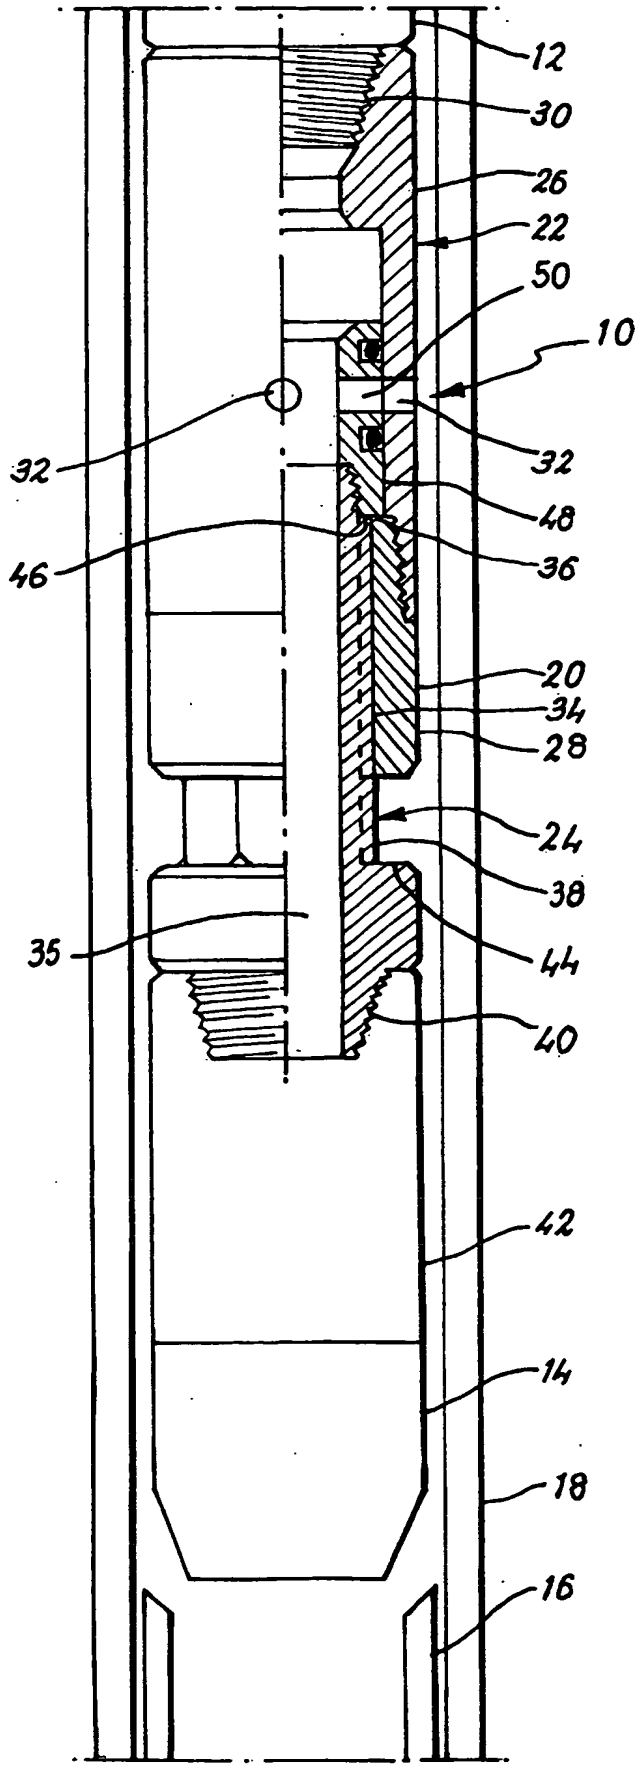

Fig. 1a

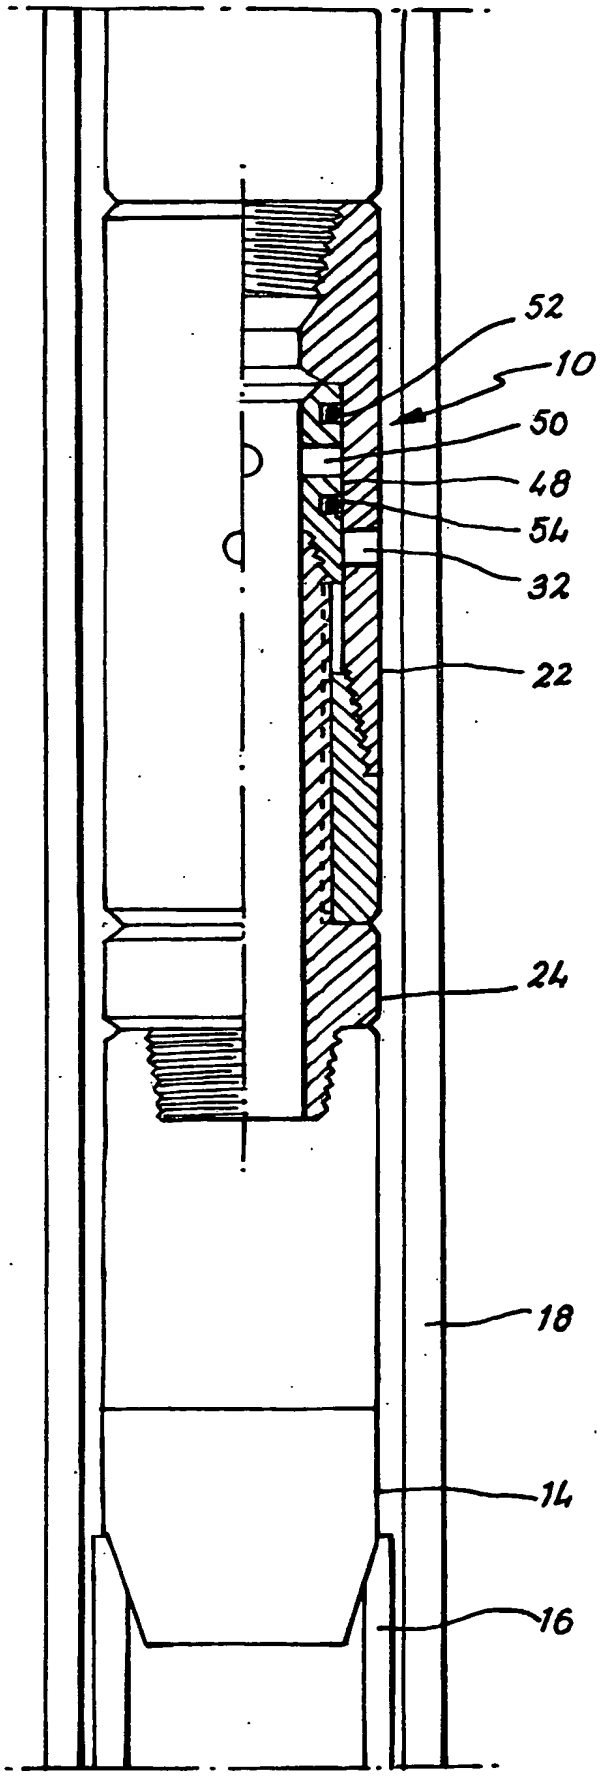

Fig.1b

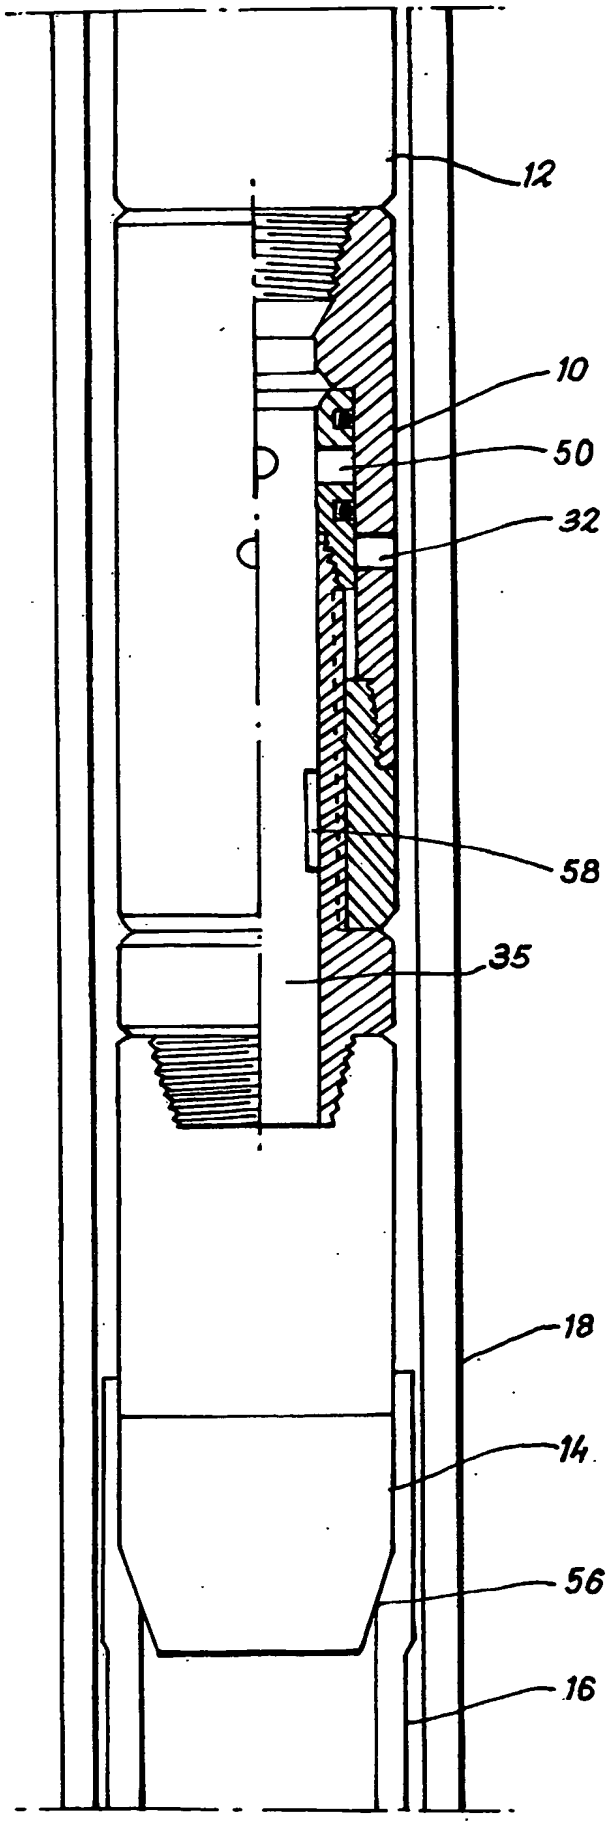

FIG. 1C

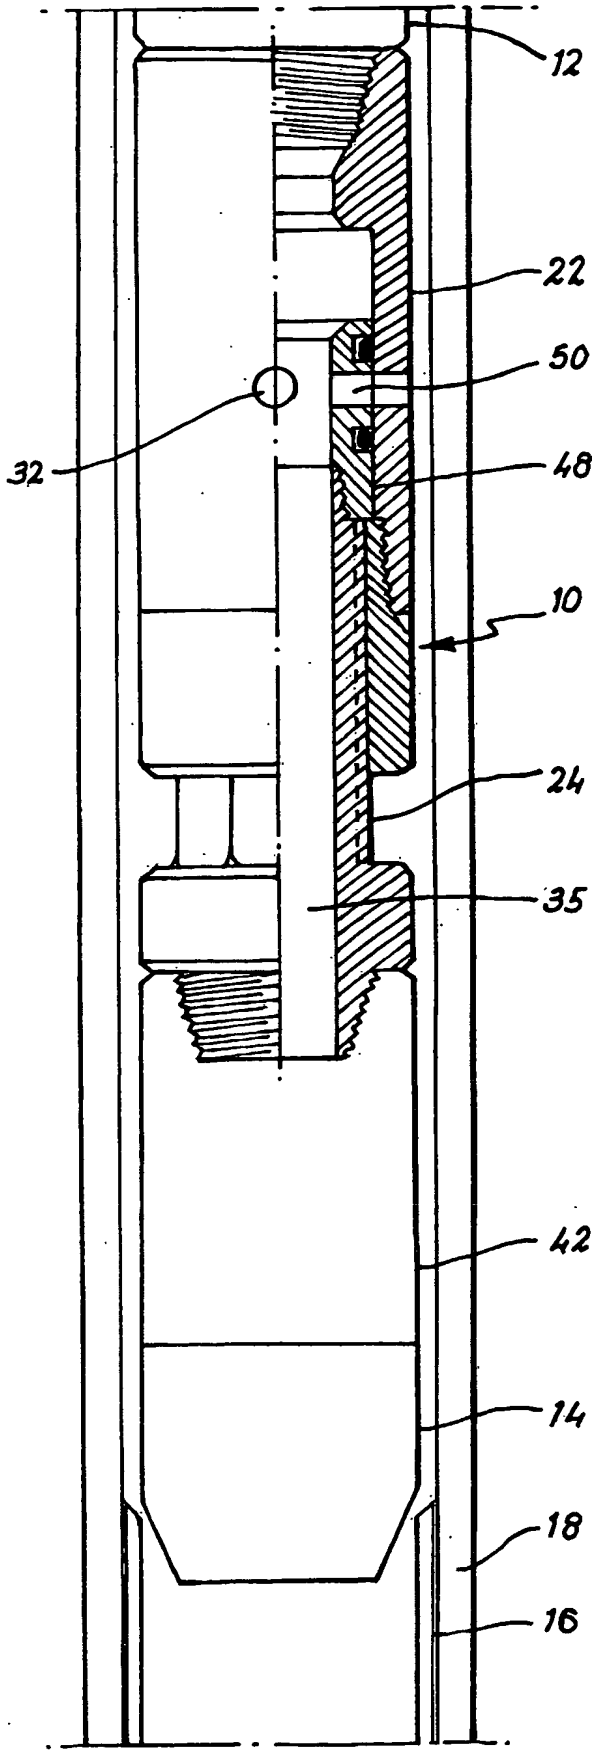

Fig 1d

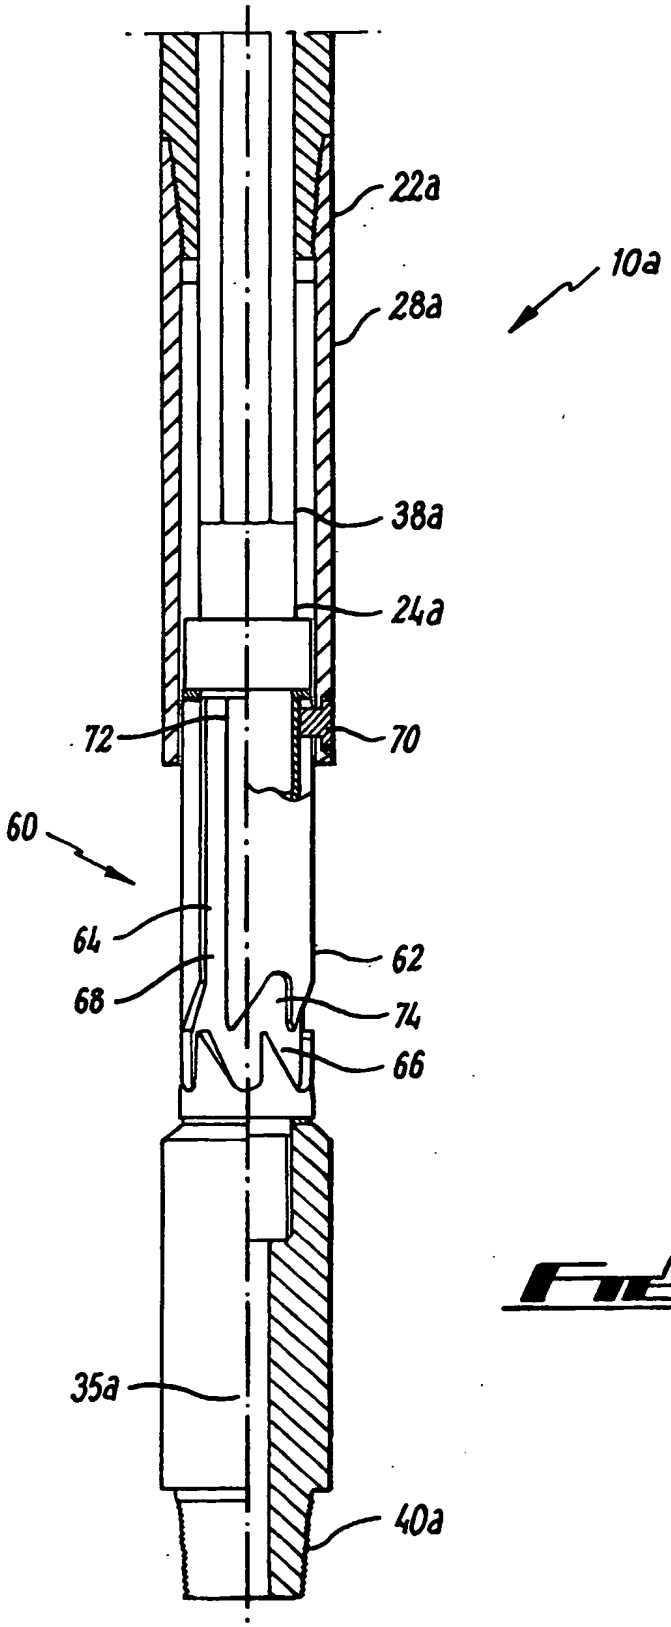

Fig.2

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01596

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E21B21/10 E21B43/10 E21B34/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE WPI Section PQ, Week 198938 Derwent Publications Ltd., London, GB; Class Q49, AN 1989-277106 XP002248689 & SU 1 469 094 A (DRILLING TECHN RES), 30 March 1989 (1989-03-30) abstract	1-6,8, 17,18
Y	---	9-16,19, 20
Y	GB 2 272 923 A (CARMICHAEL MARK) 1 June 1994 (1994-06-01) figure 1	9
Y	---	10,11
	US 6 279 657 B1 (CARMICHAEL MARK ET AL) 28 August 2001 (2001-08-28) figures 4-6	

	-/--	

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
23 July 2003	31/07/2003

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016	Schouten, A

Form PCT/ISA/210 (second sheet) (July 1992)

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 2 307 932 A (RED BARON) 11 June 1997 (1997-06-11) page 11, paragraph 1 figures 1,2	12-16, 19,20
X	US 6 161 632 A (HOVDEN MAGNE) 19 December 2000 (2000-12-19) column 11, line 26 -column 12, line 3	1-4,6-8, 17,18,21

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01596

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
SU 1469094	A	30-03-1989	SU	1469094 A1	30-03-1989
GB 2272923	A	01-06-1994	NONE		
US 6279657	B1	28-08-2001	NONE		
GB 2307932	A	11-06-1997	AU	707132 B2	01-07-1999
			AU	1068997 A	27-06-1997
			CA	2236863 A1	12-06-1997
			EP	0865564 A1	23-09-1998
			WO	9721020 A1	12-06-1997
			NO	982415 A	27-05-1998
			US	6095249 A	01-08-2000
US 6161632	A	19-12-2000	NO	954100 A	17-04-1997
			AU	7344996 A	07-05-1997
			GB	2321484 A ,B	29-07-1998
			WO	9714868 A1	24-04-1997